
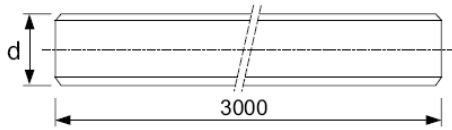


Stainless Steel Threaded Rod 3000mm 不銹鋼絲杆


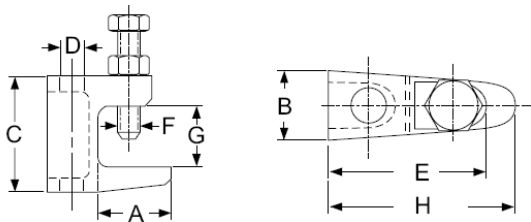
A2 / A4

DIN 975

Order example: DIN 975 A4-80 M16X3000 (Order Code: 72033.160.300)

Material Standard:	A2-70 / A4-70 / A4-80 to ISO 3506 Part 1:1997
Specification:	DIN 975
Material:	A2-70 / A4-70 / A4-80

d (diameter)	Thread Pitch	72002	72022	72023	72033	
		SS	A2-70	A4-70	A4-80	
		白鋼	304 不銹鋼	316 不銹鋼	316 不銹鋼	
M6	1	72002.060.300				30
M8	1.25	72002.080.300	72022.080.300			20
M10	1.5	72002.100.300	72022.100.300		72033.100.300	20
M12	1.75	72002.120.300	72022.120.300		72033.120.300	10
M16	2	72002.160.300	72022.160.300		72033.160.300	1
M20	2.5	72002.200.300	72022.200.300		72033.200.300	1
M24	3	72002.240.300	72022.200.300		72033.240.300	1
M27	3				72033.270.300	1
M30	3.5				72033.300.300	1
M33	3.5				72033.330.300	1

Beam Clamp 工字碼


ST ZP

02931

zinc plated, casting tolerance according DIN 1684 GTA / 17

with hexagon head screw DIN 933 8.8, threaded end with cup point (RS) according to EN ISO 4753 and locknut

for sprinkler systems, heating, ventilation and air conditioning, acoustictubes and sanitary installation machines and steel constructions

Item No	Type	A	B	C	D	E	F	G	H	Ultimate Load	Approval	
		mm	mm	mm	mm	mm	mm	mm	mm			
02931080000	TKN 8	21	19	35	M8 Ø9	35	M8	18	38	1200	VdS, UL	50
02931100000	TKN 10	23	21	42	M10 Ø11	41	M10	20	44	2500	VdS, UL FM	50
02931120000	TK 12	35	23.5	54	M12 Ø13	48	M10	26	58	3500	VdS, UL FM	50
02931160000	TK 16	30	29.5	58	M16 Ø17	55.5	M12	28	58.3	5500	VdS, FM	50