


JAM-W WEDGE ANCHOR 鍍鋅車修拉爆

ST ZP

01101

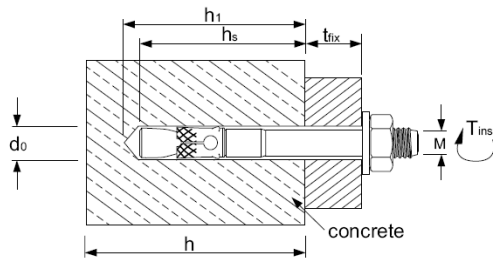

Order example: JAM-W M8X75 (order code: 01101.080.075)

Features:	Dependable, economical anchor, externally threaded, efficient through fixing, torque controlled expansion
Application:	High racking, safety barriers, hand rails, channels, brackets, cable trays, ducts and suspended ceilings
Material:	Steel, zinc plated $\geq 5\mu\text{m}$
Base Material:	Concrete (Non-cracked concrete 30 N/mm ²)

Item No.	Description	Bore x Hole Depth d0 x h1 (mm)	Setting Depth hs (mm)	Tightening Torque Tinst (Nm)	Fixture Thickness tfix (mm)	Base Material Thickness h (mm)	Tensile Load (kN)	Shear Load (kN)	
01101060050	W M6-5/50	6 x 45	36	8	5	100	1.78	2.54	100
01101060065	W M6-10/65	6 x 55	46	8	10	100	2.90	2.54	100
01101080060	W M8-5/60	8 x 55	45	15	5	100	3.13	5.55	100
01101080075	W M8-10/75	8 x 65	55	15	10	100	4.67	5.55	100
01101080110	W M8-45/110	8 x 65	55	15	45	100	4.67	5.55	
01101100070	W M10-10/70	10 x 60	48	30	10	100	4.01	7.86	50
01101100090	W M10-20/90	10 x 70	58	30	20	100	5.86	7.86	
01101100100	W M10-30/100	10 x 70	58	30	30	100	5.86	7.86	
01101100120	W M10-50/120	10 x 70	58	30	50	100	5.86	7.86	
01101120090	W M12-5/90	12 x 80	70	50	5	120	7.58	11.00	
01101120120	W M12-25/120	12 x 90	80	50	25	150	9.90	11.00	20
01101120170	W M12-75/170	12 x 90	80	50	75	150	9.90	11.00	
01101160100	W M16-5/100	16 x 90	75	100	5	150	9.40	19.00	
01101160120	W M16-5/120	16 x 110	95	100	5	150	15.11	19.00	
01101160140	W M16-25/140	16 x 110	95	100	25	180	15.11	19.00	
01101160215	W M16-100/215	16 x 110	95	100	100	180	15.11	19.00	
01101200170	W M20-30/170	20 x 130	115	200	30	220	19.50	19.11	